



DATI TECNICI / TECHNICAL DATA

Fluido / Fluid	Aria / Air
Pressione Max / Maximum pressure	15 bar
Temperatura / Temperature	-10 / +50° C
Grado di filtrazione / Filtration grade	5 - 20 - 50µm
Portata a 6 bar con Δp 1bar / 6bar flow rate with Δp 1bar	800 NI/min
Capacità tazza / Bowl capacity	17,5cm ³

PRODOTTI STANDARD / STANDARD PRODUCTS

Codice Code	taglia size	filetto thread	filtrazione filtration	portata flow rate	scarico exhaust
XF0121	0	1/8	20µm	800NI/min	S/M
XF0221	0	1/4	20µm	800NI/min	S/M

S/M: Semiautomatico Manuale / Semi automatic Manual

CHIAVE DI CODIFICA / ORDERING CODE

XF 0,0,0,1

→ GRADO DI FILTRAZIONE / FILTRATION GRADE

1 = 5 µm


2 = 20 µm STANDARD

3 = 50 µm


→ FILETTO / THREAD

1 = G 1/8 (TAGLIA 0)

2 = G 1/4 (TAGLIA 0)

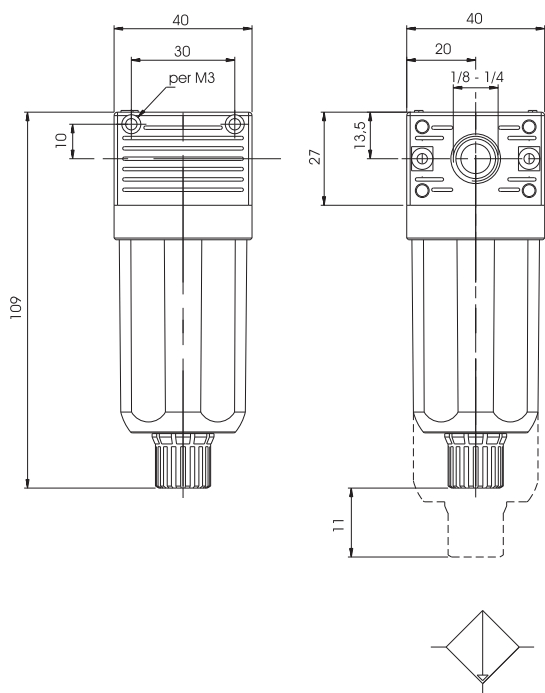

COMPONENTI / COMPONENTS

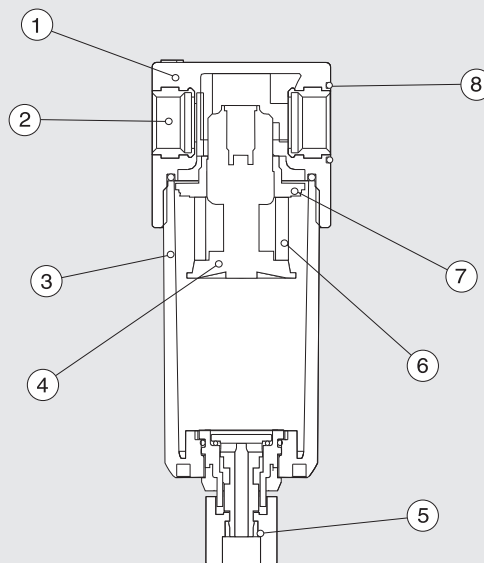

1	Corpo / body	tecnopolimero / technopolymer
2	Inserito filettato / threaded insert	ottone / brass
3	Tazza / bowl	tecnopolimero / technopolymer
4	Portafiltro / filter ring	tecnopolimero / technopolymer
5	Scarico condensa / condensate exhaust	tecnopolimero / technopolymer
6	Cartuccia filtrante / filtering cartridge	PE
7	Centrifugatore / slinger	tecnopolimero / technopolymer
8	O-ring / o-ring	NBR