



DATI TECNICI / TECHNICAL DATA



Fluido / Fluid	Aria / Air		
Pressione Max / Maximum pressure	15 bar		
Temperatura / Temperature	-10 / +50° C		
Portata a 6 bar con Δp 1bar / 6bar flow rate with Δp 1bar	1=1850 NI/min	2=3000NI/min	3=5200NI/min
Viti per fissaggio / Wall clamping screws	1=M4X14	2=M5X18	3=M6X20
Solenoide / Solenoid	24V DC 3W - 220V AC 5VA		

PRODOTTI STANDARD / STANDARD PRODUCTS

codice code	taglia size	filetto thread	comando drive
XA1300	1	3/8	EP
XA2300	2	3/8	EP
XA2400	2	1/2	EP
XA3500	3	3/4	EP
XA3600	3	1"	EP



EP: Elettropneumatico (senza bobina) / Electropneumatic (without coil)

TAGLIA 1 / SIZE 1

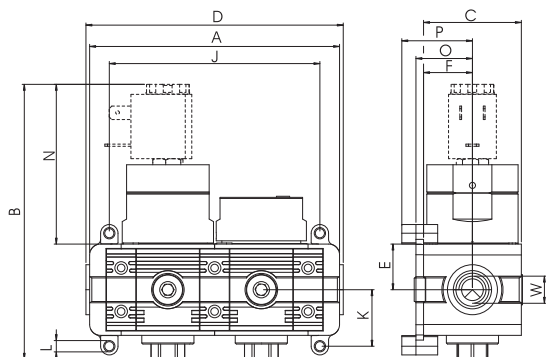

	1
A	115
B	126,5
C	45
D	118,4
W	1/8 - 1/4 - 3/8
E	21
F	22,5
J	97
K	26
L	Ø X M5
N	73,5
O	26
P	32,5

TAGLIA 2 - 3 / SIZE 2 - 3

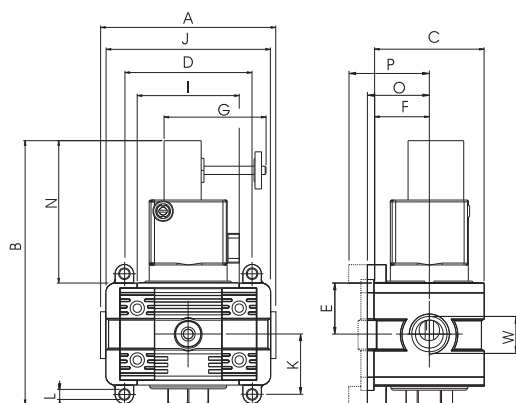

	2	3
A	104	115
B	142	131,5
C	59	70
D	89	106 106 111
W	1/4 - 3/8 - 1/2	1/2 - 3/4 - 1"
E	27,5	32,5
F	28,5	35
G	55,5	55,5
I	55	65
J	97	109
K	22	27
L	Ø X M5	Ø X M5
N	76,5	76,5